

NOTES: UNLESS OTHERWISE SPECIFIED

1. CONSTRUCTION:
HOUSING & PLUNGER: MOLDED NYLON TYPE 6,6.
AVAILABLE IN TEN COLORS.

CONTACT BLADE: BERYLLIUM COPPER, GOLD PLATED
PER MIL-G-45204 B TYPE 1

0.00001 [0.000254] THK MINIMUM.
SPRING: STAINLESS STEEL TYPE 302.

2. PERFORMANCE:

MAXIMUM CURRENT: 4.4 AMPS WITH 76°
TEMPERATURE RISE.


MAXIMUM VOLTAGE: 2.4 KV

MAXIMUM TEMPERATURE: 200°F (93°C)

3. FEATURES:

SLIPS INTO PC BOARD TEST POINT HOLES
AND LOCK ONTO THE BOARD.

FITS HOLE $\phi 0.031$ [$\phi 0.79$] TO $\phi 0.033$ [$\phi 0.84$].
FIELD SERVICEABLE.

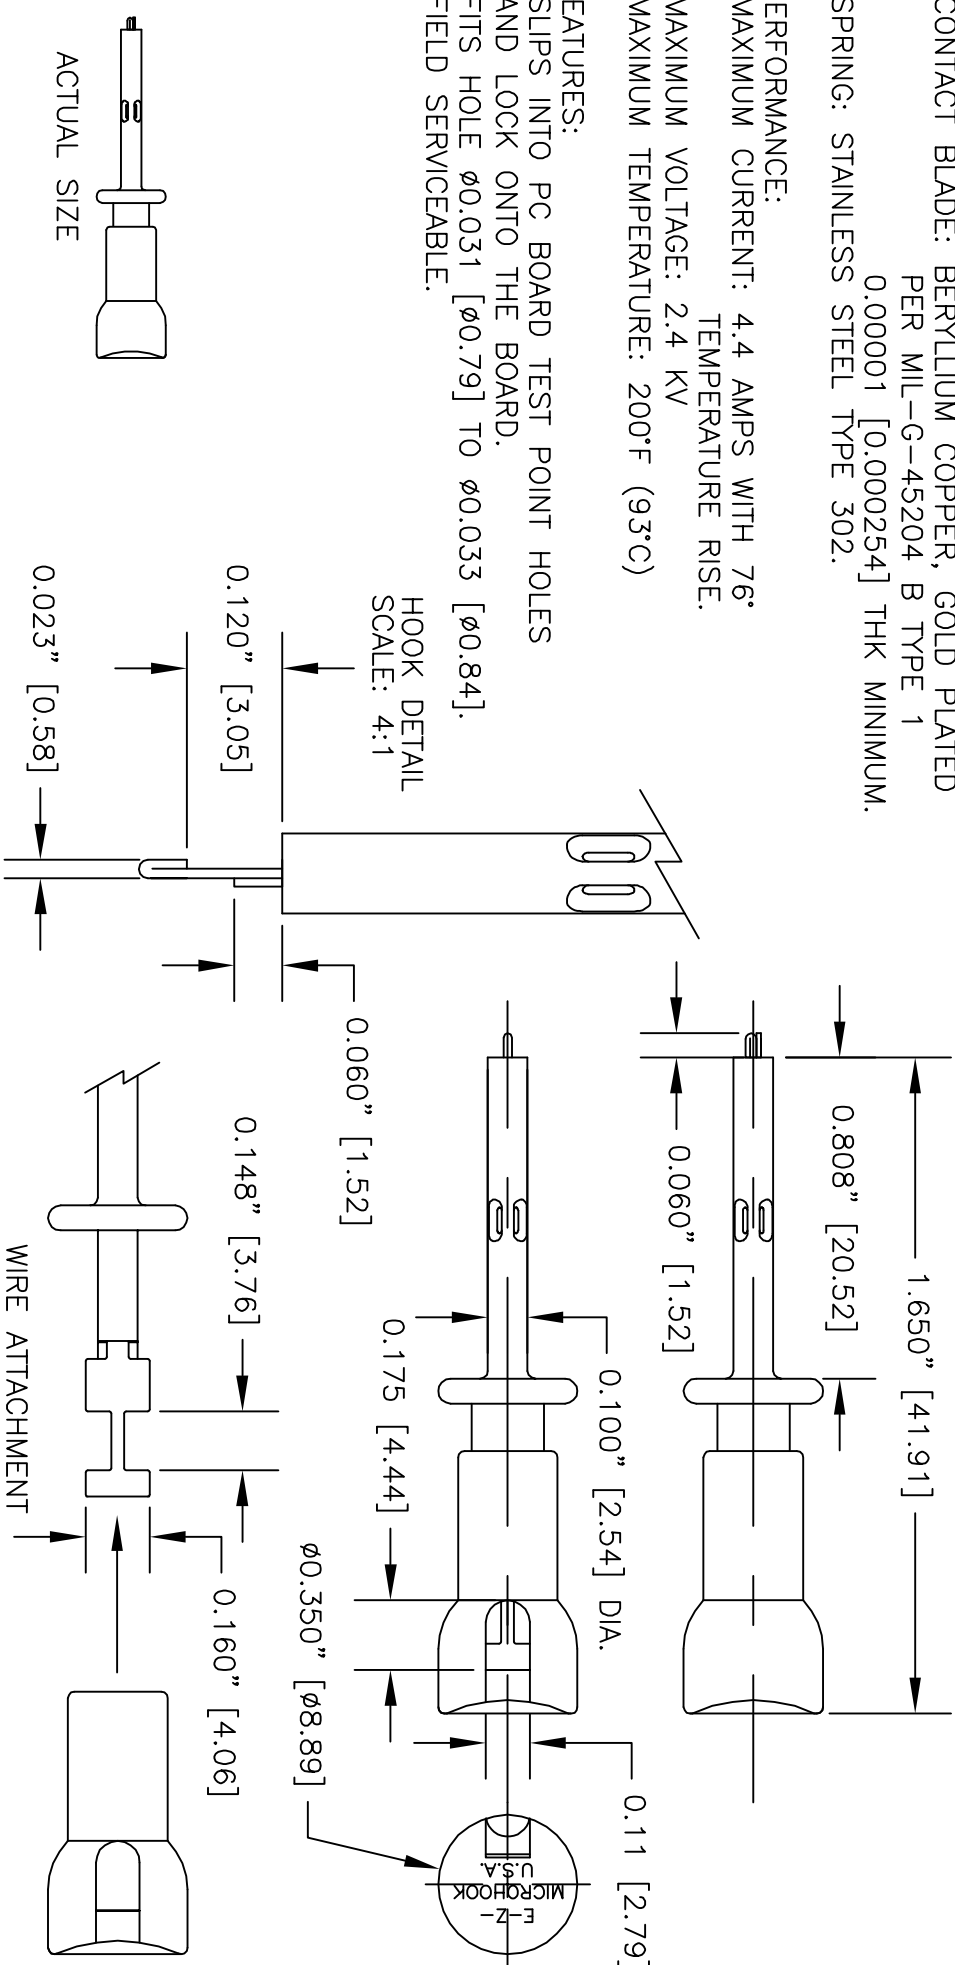

LTR	DESCRIPTION	REVISIONS	DATE	APPROVED

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ARE: FRACTIONS DECIMALS ANGLES		CONTRACT NO.	
± .XX ±	±	APPROVALS	DATE
± .XXX ±	±	DRAWN	R.L.
MATERIAL SEE NOTE.		APPROVED BY	7/09
FINISH SEE NOTE.		DESCRIPTION	
NEXT ASSY USED ON		E-Z MICRO-LOCK HOOK CONNECTOR	
APPLICATION DO NOT SCALE DRAWING		SIZE	CODE IDENT NO. DRAWING NO.
		A	08505 XG31 COLOR
		SCALE	2:1
		SHEET	1 OF 1
		REV.	

E-Z-HOOK DIVISION OF TEKTEST INC.
ARCADIA, CA 91006 U.S.A.

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-Z-HOOK. THE INFORMATION IS NOT TO BE REPRODUCED WITHOUT PRIOR WRITTEN PERMISSION OF E-Z-HOOK, DIV. OF TEKTEST INC. MAXIMUM TESTED RATINGS IN A HANDS-FREE CONTROLLED ENVIRONMENT. MAXIMUM RATINGS ARE NOT TO BE USED CONCURRENTLY.